



ATTACHMENTS & ACCESSORIES

A wide range of attachments and accessories make PneuTorques adaptable to many applications.

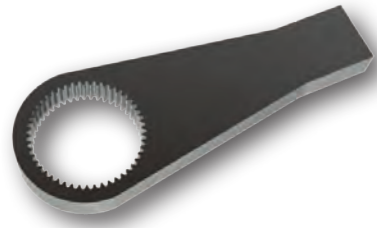

Single sided reaction plate

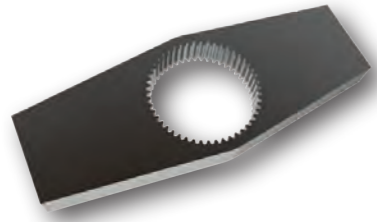

Double sided reaction plate



Cranked steel reaction plates



(19286)

Dual Trigger Module

A secondary trigger for use with all PTS and PTM tools. This requires the operator to use both hands to run the tool so reduces the risk of hands getting trapped between the reaction bar and reaction point



(19363)

Secondary Handle*

The secondary handle is an easy to fit and versatile accessory which offers additional support and ease of handling when applying torque with Norbar's powered multipliers

*Not suitable for use with 52 series



(180280)

Right Angle Gearbox

The Right Angle Gearbox will provide most ET, PTS and PTM tools with a 90° angle of operation, enabling the operator to reach more applications where access is restricted and limited

Right Angle Gearbox Coming Soon



(16074)

Lubro Control Unit

Norbar's standard filter, regulator, lubricator unit features a large, 100mm diameter gauge for easy and accurate setting of air pressure



(16075)

Twin Lubro Control Unit

The same features as Norbar's standard filter, regulator, lubricator unit, with additional benefits of two regulators and a switch that allows quick selection between two air pressure settings



(60290)

Multi Channel Lubro

The Multi Channel Lubro is for users who wish to run their pneumatic tools at multiple air pressure settings, without having to make time consuming adjustments to an air regulator



We have always prided ourselves on the service we provide to our customers, whether it is a 1/4" socket or complex DC Multi-Spindle unit. Combining a range of the highest quality products with the support of our skilled, highly trained staff. Our motto is "if we cant support it, we wont sell it".

Applied Torque offer the full package providing Sales-Hire- On-Site Calibration-In House Calibration-Service-Repair-Design & Manufacture.

To know more of what we do, visit us at:
Applied Torque Systems Ltd
Unit S, Trecenydd Industrial Estate, Caerphilly, CF83 2RZ

Call us on:
02920 888883

Email us:
sales@appliedtorque.co.uk

Or visit our website:
www.appliedtorque.co.uk

NEW



PNEUTORQUE® PTS
ACCURATE, EFFICIENT, QUIET
PNEUMATIC TORQUE TOOLS



NORBAR HAVE COMBINED A NEW AIR MOTOR, THE RESULT OF AN EXTENSIVE DESIGN PROJECT, WITH THEIR RESPECTED GEARBOXES TO DELIVER THE NEW PTS RANGE OF ACCURATE, EFFICIENT, QUIET PNEUMATIC MULTIPLIERS



PTS-80 Coming Soon



The square drive is quickly and easily replaceable

A single efficient bi-directional air motor

Robust steel reaction supplied as standard

Bespoke reactions available on request

Tried and tested gearbox, reliable and proven over more than a decade



Easily accessible switch for forward and reverse operation

Accuracy is better than $\pm 3\%$


Non impacting - exceptionally low vibration levels, (0.343 m/s^2) make these tools comfortable and safe for operator use

Very quiet operation - reducing the need for protection with sound pressure levels from 77dB(A) to 79dB(A)



Handle and trigger designed for optimum comfort

Directional exhaust barrel directs exhaust away from operator

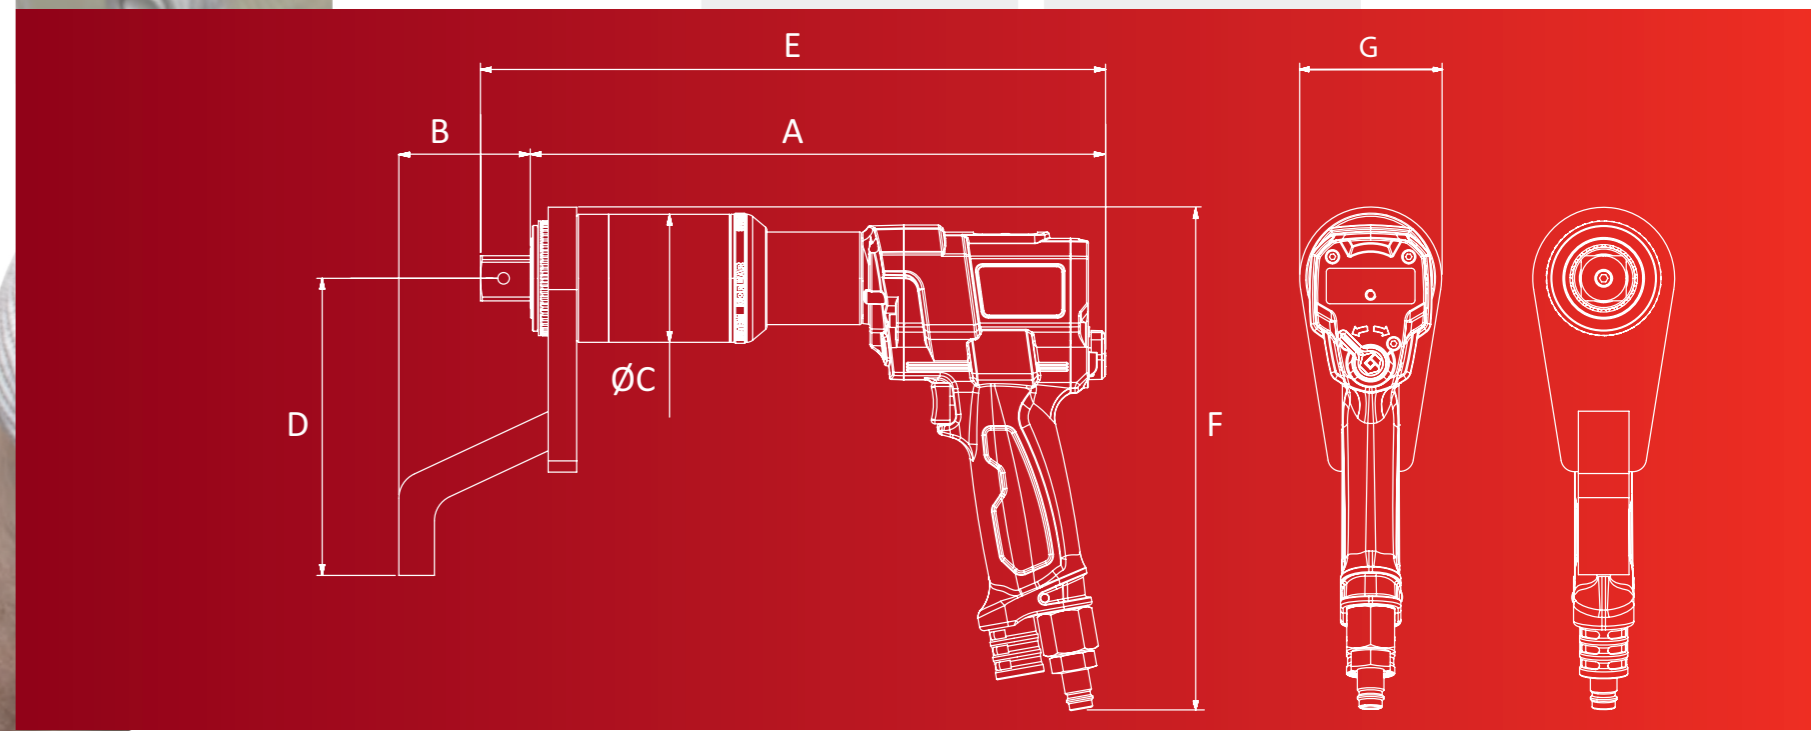

TECHNICAL SPECIFICATION

PART NUMBER	MODEL	SQUARE DRIVE	RANGE		DIMENSIONS (mm)							TOOL WEIGHT (kg)	REACTION WEIGHT (kg)	OUTPUT SPEED (rpm)
			N-m	lbf-ft	A	B	C	D	E	F	G			
180241.B06	PTS-52-500	3/4"	100 - 500	74 - 370	263	59	Ø52	131	287	256	69	4.2	0.85	35.5
180242.B06	PTS-52-800	3/4"	160 - 800	118 - 590	263	59	Ø52	131	287	256	69	4.2	0.85	25.7
180243.B06	PTS-72-1000	3/4"	200 - 1000	147 - 738	290	74	Ø72	167	318	266	80	6.24	1.4	20.4
180244.B08	PTS-72-1350	1"	270 - 1350	200 - 1000	290	74	Ø72	167	318	266	80	6.24	1.4	14.7
180245.B08	PTS-72-2000	1"	400 - 2000	295 - 1475	323	74	Ø72	167	352	266	80	6.6	1.4	9.2
180246.B08	PTS-80-2700	1"	540 - 2700	400 - 2000	290	74	Ø80	167	320	266	80	6.15	1.4	7.3
180247.B08	PTS-92-4000	1"	800 - 4000	590 - 2950	347	70	Ø92	175	377	272	92	8.95	2.5	5.3
180247.B12	PTS-92-4000	1 1/2"	800 - 4000	590 - 2950	347	70	Ø92	175	387	272	92	8.95	2.5	5.3
180248.B12	PTS-119-6000	1 1/2"	1200 - 6000	885 - 4425	369	90	Ø119	210	407	285	119	12.52	3.8	2.6

*Provisional Information