

▼ Shown clockwise from top: **WR-15, WR-5, A-92**



## A, WR Series

Capacity:  
**0.75-1.00 ton**

Tip Clearance:  
**0.50-1.38 inches**

Maximum Spread Range:  
**3.70-11.50 inches**

Maximum Operating Pressure:  
**10,000 psi**



**RC-Series DUO Cylinders**  
10 ton RC-Series DUO cylinders (except RC-101) fit into A-92 Spreader Attachment.


Page: **6**




**Best Match Hand Pump**  
To power your WR5 and WR15 the **P-392** hand pump is an ideal choice.

Page: **70**


- Single-acting, spring return
- **WR-15:** For long stroke spreading applications
- **WR-5:** For use in very confined work areas
- **A-92:** Spreader attachment screws onto RC-Series 10-ton cylinders (except RC-101)\*



**WR-5**

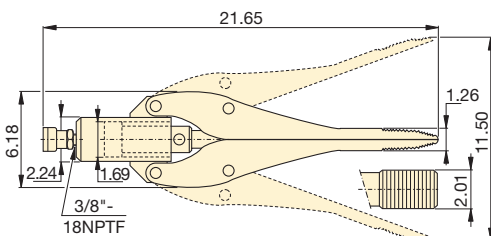

**WR-15**



**A-92\***

Spreader Capacity	Tip Clearance	Model Number	Maximum Spread	Cylinder Effective Area	Oil Capacity	Wt.
(ton)	(in)		(in)	(in <sup>2</sup> )	(in <sup>3</sup> )	(lbs)
1.00	.50	<b>WR-5</b>	3.70	1.00	.61	5.0
.75	1.26	<b>WR-15</b>	11.50	2.25	3.91	25.0
1.00	1.38	<b>A-92*</b>	6.25	–	–	8.0

\* Maximum system pressure must be limited to half the rated pressure (5000 psi)

▼ A WR-5 Wedgie cylinder is used to loosen a bridge bearing.

