


EVERY JOINT IS DIFFERENT.

EVOTORQUE® 2'S INTELLIGENT JOINT SENSING TECHNOLOGY ALWAYS DETECTS WHICH TYPE OF BOLT YOU ARE WORKING WITH.


Traditional electronic torque tools give vastly different results depending on the joint type. Norbar's intelligent joint sensing technology eliminates these issues so that you can be confident in your bolting work.

Hard joints
(High Torque Rate*)

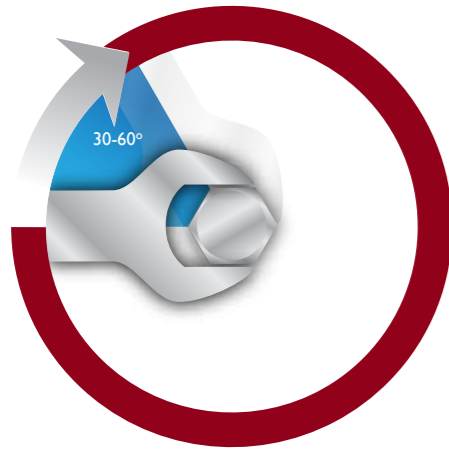

Joints completed within the range 30-60 degrees

Soft joints
(Low Torque Rate*)

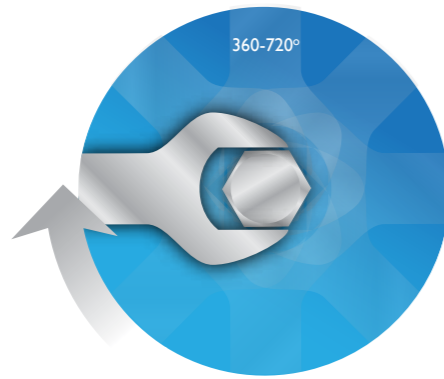


Joints completed within the range 360-720 degrees


*High torque rate and low torque rate as defined by ISO5393 "Rotary tools for threaded fasteners - Performance test method"

ACCURACY OF ELECTRONIC TORQUE TOOLS


First generation

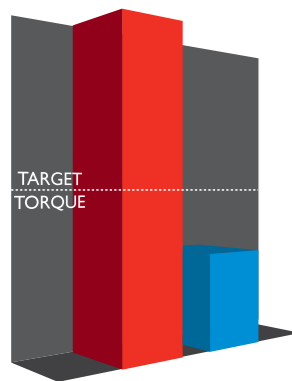

Best of present generation

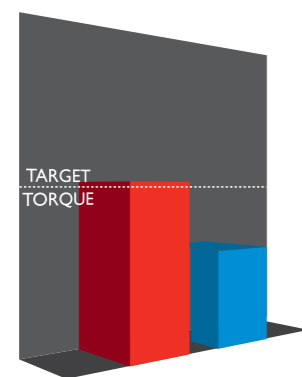

New generation EvoTorque®2

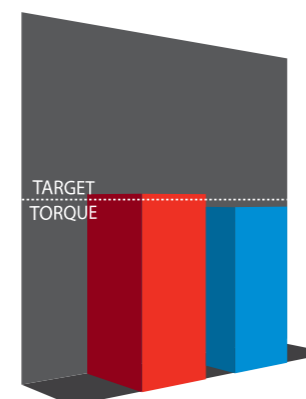

We have always prided ourselves on the service we provide to our customers, whether it is a 1/4" socket or complex DC Multi-Spindle unit. Combining a range of the highest quality products with the support of our skilled, highly trained staff. Our motto is "if we cant support it, we wont sell it".

Applied Torque offer the full package providing Sales-Hire- On-Site Calibration-In House Calibration-Service-Repair-Design & Manufacture.

To know more of what we do, visit us at;
Applied Torque Systems Ltd
Unit S, Trecenydd Industrial Estate, Caerphilly, CF83 2RZ

Call us on:
02920 888883

Email us:
sales@appliedtorque.co.uk

Or visit our website:
www.appliedtorque.co.uk



NEW



EVOTORQUE® 2
AN EVOLUTION FOR
TORQUE CONTROL



NORBAR HAVE COMBINED PROVEN JOINT SENSING TECHNOLOGY, DATA MEMORY AND TRANSFER CAPABILITIES WITH TORQUE, TORQUE AND ANGLE AND AUDIT MODES TO PRODUCE A HIGHLY ACCURATE, USER FRIENDLY, ROBUST AND VERSATILE ELECTRONIC TORQUE TOOL

The EvoTorque®2 is an electronic torque tool designed for accurately applying torque to threaded fasteners. The unique 'intelligent joint sensing' technology continually measures the joint during tightening and, when necessary, employs dynamic braking to avoid torque over-shoot due to motor inertia.



Easily removable secondary handle for balanced handling of the tool



Steel reactions supplied as standard. Bespoke reactions available, please see opposite page

Tried and tested gearbox reliable and proven over more than a decade on the Pneumatic Torque Multiplier platform

Brushless motor for low maintenance

Clear indication of successful joint application

IP44 protection against dust and water ingress

OLED display ensures visibility in all conditions
Key Lock feature prevents unauthorised usage

On-board control box making the tool more portable and convenient



Supplied with complimentary PC software "EvoLog" Send 'Log Results' in real time Output results in CSV format

Ability to download up to 12 User IDs to the tool 12 Standalone Work IDs plus 12 Work IDs in each Work Group

Several reaction bar styles available, including versions for restricted space applications Steel and aluminium versions available plus specific reactions for the Wind Industry




KEY FEATURES

- Multiple units of torque measurement, including N-m, lbf-ft, ft-lb and kgf-m
- Calibrated from 20% to 100% of tool range
- Torque, Torque & Angle and Torque Audit modes available
- In Torque and Angle Mode and Audit Mode, torque can be set from 10% of tool maximum
- Display and on-board storage of final torque or torque and angle values
- 3000 reading memory, time and date stamped
- Clear indication of successful joint application
- USB and Bluetooth® 4.0 data transfer (also called Bluetooth® Smart)
- Complimentary PC software 'EvoLog' for data management and tool configuration
- 12 user IDs can be downloaded to the tool and results can be stored against individual users
- 20 unique standalone targets plus 20 unique work group targets for each work group
- Results can be output in CSV (comma-separated values) format for users not able to use EvoLog

Features from May 2017

- Ability to produce and store real time graphs via EvoLog
- Torque & Angle with Final Torque
- 'Usage' counter gives the ability to see the amount of times the tool has been used since the last reset
- "Operation Direction" feature designed primarily for undoing bolts. When doing sequence tightening, it is now possible to undo an incorrectly tightened bolt without interrupting the sequence.
- Two stage tightening gives faster application of a Snug Torque & Angle Target
- "Turn Angle" option can be used to check if bolts have already been tightened in an assembly process
- Allows tool integration into third party control systems
- Two different lock levels, lock level 1 as per previous lock, lock level 2 will not allow user to exit the run screen or change the target
- Maximum Audit Mode target angle increased to 720 degrees

TECHNICAL SPECIFICATION

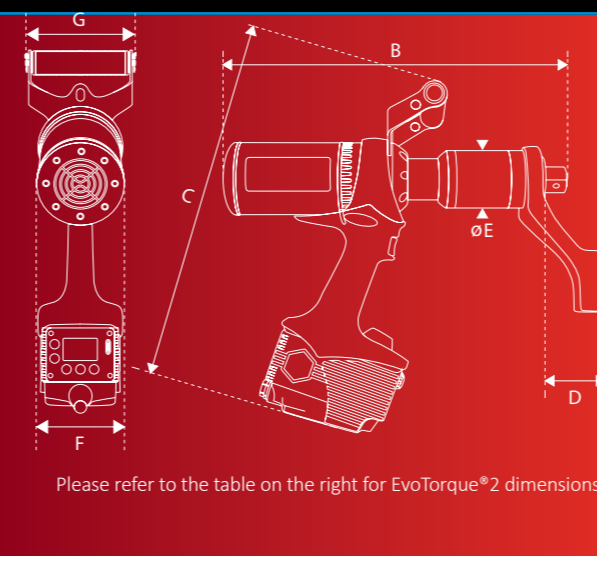

MODEL	ET-72-1000-110 ET-72-1000-230	ET-72-1350-110 ET-72-1350-230	ET-72-2000-110 ET-72-2000-230	ET-92-2700-110 ET-92-2700-230	ET-92-4000-110 ET-92-4000-230	ET-119-6000-110 ET-119-6000-230	ET-119-7000-110 ET-119-7000-230
Part Number - 110V	180230.B06	180231.B06	180232.B08	180233.B08	180234.B08	180235.B12	180236.B12
Part Number - 230V	180220.B06	180221.B06	180222.B08	180223.B08	180224.B08	180225.B12	180226.B12
Square Drive	¾"	¾"	1"	1"	1"	1 ½"	1 ½"
Range	N-m 148- 738	270- 1350	400- 2000	540- 2700	800- 4000	1200- 6000	1400- 7000
Speed rpm	21	17	11	8.5	6	3.3	3.3
Tool Weight	kg 10.4	10.4	10.8	12.85	12.85	16.8	16.8
Reaction Weight	kg 1.5	1.5	1.5	2.6	2.6	3.9	3.9
B (mm)	390	390	425	450	450	480	480
C (mm)	438	438	438	438	438	438	438
D (mm)	77	77	77	75	75	95	95
E (ø mm)	72	72	72	92	92	119	119
F (mm)	100	100	100	100	100	115	115
G (mm)	135.5	135.5	135.5	135.5	135.5	135.5	135.5

Please refer to the table on the right for EvoTorque®2 dimensions